

Forest fires spread modeling using cellular automata approach

Ljiljana Bodrožić, Darko Stipaničev, Marijo Šerić

Department for Modelling and Intelligent Systems
FESB - Faculty of Electrical Engineering, Machine Engineering and Naval Architecture
UNIVERSITY OF SPLIT, 21000 Split, CROATIA, R.Boškovića bb
Web: <http://laris.fesb.hr> Contact e-mail: ljiljana@fesb.hr

Abstract. Fire modeling is used to understand and to predict possible fire behavior without getting burned. Fire models are used in different aspects of fire management: a) before fire, for risk factor calculation and this would help fire fighters to focus on area with higher risk and develop better infrastructure, b) before fire for fire fighter training purposes and developing a scenario for training, c) during fire, for planning fire fighting strategies and this would help fire crews position equipment on the ground so that they can minimize damage and stay safe. The paper will present how we can predict forest fire spread using cellular automata. This work on forest fire modeling is a part of more complex integral project of Split and Dalmatia County forest fire protection. The integral forest fire protection system will be based on information system for integration all activities connected with early fire detection by 24 hours video and micro locations meteorological monitoring, management of forest fire fighting and post-fire recuperation of burned landscape. The module for the forest fire spread modeling is one of its modules.

Fire Spread Models

Numerous fire spread models have been proposed. They can be grouped into :

- Empirical (or statistical) models: these models are predicting more probable fire behavior from average conditions and accumulating knowledge obtained from laboratory and outdoor experimental fire, or historical fires.
- Semi-empirical (semi-physical or laboratory models): models based on a global energy balance (FRANSEN 1971) and on the assumption that the energy transferred to the unburned fuel is proportional to the energy released by the combustion of the fuel, several terms of the model being fitted to laboratory fire experimental results (ROTHERMEL 1972).
- Physical (theoretical or analytical): Models based on physical principles, have the potential to accurately predict the parameters of interest over a broader range of input variables than empirically based models

More detail classification is given in Figure 1.

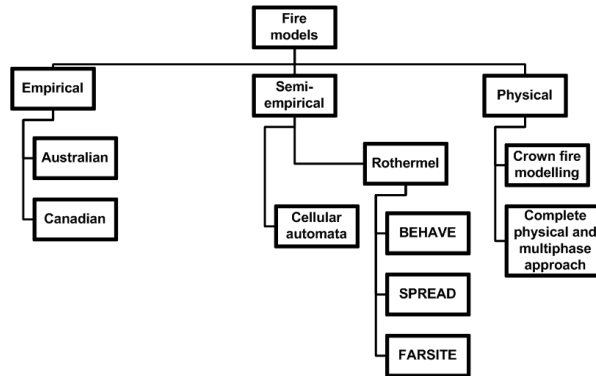


Fig. 1. Classification of forest fire models

The method described in this paper is based on cellular automata and it belongs to semi-empirical models.

Cellular automata and spatial modeling


Cellular automata are dynamical systems operating discrete in space and time, on a uniform, regular lattice and characterized by "local" interactions.

Cellular Automata were invented by the mathematician Stanislaw Ulam and were used by J. von Neumann, followed by A.W. Burks and E.F. Codd, to solve problem of the non-trivial self-reproduction in a logical system [3,7].

A cellular automata is defined by a grid with start states and set of rules for state transitions.

Generally, cellular automata consists of four elements, which could be considered as a *tuple* (X, S, N, f)

- X are cells which are objects in any dimensional space, we can call this cellular space. In cellular space, each cell has the form $x=(x_1, x_2, x_3, \dots, x_m)$, where m is the dimension of the space. All cells have some forms of neighborhood.
- S is a nonempty finite set of automaton states. Each cell can take on only one state at any one time from a set of states, $s \in S$. Strict CA also requires state variables to be discrete.
- Neighborhood Template N - the state of any cell depends on the states and configurations of other cells in the neighborhood n of that cell. In two-dimensional space, there are two well-known templates, Von Neumann or 5 cell neighborhood, as shown in Fig. 2. and Moore, 9 cell neighborhood, as shown in picture Fig. 3.

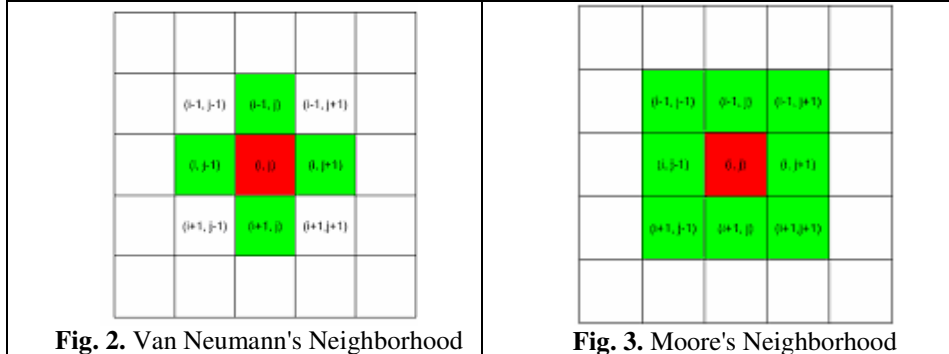

– f is state transition function rule

$$f \in F \tag{1}$$

$$S_c^{t+1} = f(S_c^t, S_{n(c)}^t)$$

The transition rule will take the previous state of a cell and the status of neighborhood $S_{n(c)}^t$ as input and return the status S_c^{t+1} at time $t+1$

Also cellular automata can be implemented with rules of different range. Range of 1 means that only the nearest cells are considered as neighbor cells, and higher range means that more nearby cells are considered, as shown in **Fig. 4**

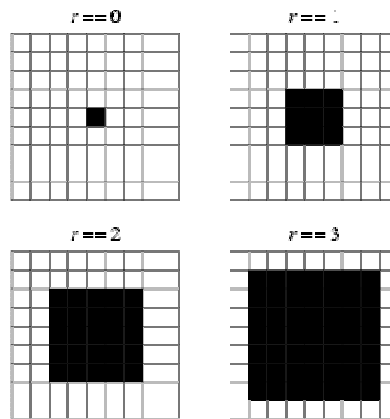


Fig. 4. range of cellular automata

Fire spread modeling using cellular automata

Landscapes can be represented as cellular automata. Thus, it is possible to apply cellular automata formulations to a number of a landscape diffusion process such as forest fires [5].

The most common approach for fire modeling has been to simulate fire growth as a discrete process of ignitions across a regularly spaced landscape grid of cells. Each cell represents a fixed surface area and has attributes that correspond to environmental features such as vegetation cover and topography. Computational methods are used to automate the application of fire shape models to non uniform conditions by assuming local uniformity.

We can assign a numerical value to each cell following this convention:

- A burning cell has a value of 3
- A burnt cell has a value of 2
- A growing cell has a value of 1, and
- The state where it can be ignited has a value of 0

We can use the following rules for cell evolution:

- A cell that is in an ignitable state remains in an ignitable state unless at least one neighbor is burning. In this case the cell becomes burning in the next step.
- A burning cell becomes a burnt cell in the next step.
- A burnt cell becomes a growing cell in the next step.
- A growing cell becomes an ignitable cell in the next step.

Cellular automata fire spread model implemented on island Brac

In order to implement cellular automata model on specific area we need to obtain input data required by the model. In our case we need a matrix grid where each cell has assigned value that represents parameters that affect forest fire. Each cell is representing a tree or no tree – can or can not burn. Probability that a cell holds a tree is calculated from vegetation characteristics, obtained in GIS format.

Corine Land Cover

Corine land cover is a project which is being co-ordinated by the European Environment Agency.

Main aims of the CORINE (Coordination of information on the environment) program of the Commission European are:

- to compile information on the state of the environment with regard to certain topics which have priority for all the Member States of the Community;
- to coordinate the compilation of data and the organization of information within the Member States or at international level;
- to ensure that information is consistent and that data are compatible.

CORINE Land Cover (CLC) is based on a simple 3-level hierarchy classification system consisting of 44 land cover classes.

Corine land cover maps are created by analyzing satellite images of earth surface . Project includes nearly all European countries, except Croatia. There are some speculations that Croatia will join the project in the future.

Anyway, Corine Land Cover map for island Brac already exists and it is available in vector shape format which was imported into the GRASS Gis location of island Brac. GRASS Gis is the biggest open source GIS software project. It consists of many modules. GRASS can import and export all main different formats, can convert raster to vector and vice versa.

We converted imported vector data into a raster consisting of matrix which cells hold the corine code of land use.

Then we used the export module to convert raster data in matlab workspace file.

Loading the .mat file in matlab workspace created variables shown in Table 1.

Table 1. variables exported from grass

Name	Dimensions	Size	Data type
map_data	821x2016	13241088	double array
map_eastern_edge	1x1	8	double array
map_name	1x16	32	char array
map_northern_edge	1x1	8	double array
map_southern_edge	1x1	8	double array
map_western_edge	1x1	8	double array

map_data is a matrix of corine codes. It is data that will be taken into account.

We converted corine codes into density of burnable cells using following asumptations:

- The cells with corine family code 100 are nonburnable cells, an automatically are assigned value 0.
- Cells of corine family code 200 are cells with short grass, vineyards, and we assumed that about 30% of them are burnable.
- Cells with family code 300 are forest, and we assigned them burnability of 70%.

We assigned following numbers to represent the state of cell:

0 – the cell is unburned and can not burn.

1 – the cell is burning

2 – the cell represent a tree that is not burning, but have tension to burn if fire occurs in neighboring cells.

The rules used in simulation are:

1. Unburned cell becomes a burned if one of the neighbor cells is burning 2->1
2. Burning cell becomes unburnable in the next step 1->0
3. If there are wind conditions one cell of range 2 in the direction of wind is taken into calculation as neighbor cell.

To automate this process we created a MATLAB script file corinetrans.m which must be called after loading .mat file.

Results of simulation:

Example 1: No wind conditions:

The first example describes simulation started in forest with high density without wind conditions. Pictures below show results after 7, 14 and 30 time steps. The shape of fire is elliptical. After 14 steps the east side of fire front has reached the area with lower flammability (forest with lower wood density, or some form of agricultural land). In the last picture we can see that fire spread was slower for that area than for the forest.

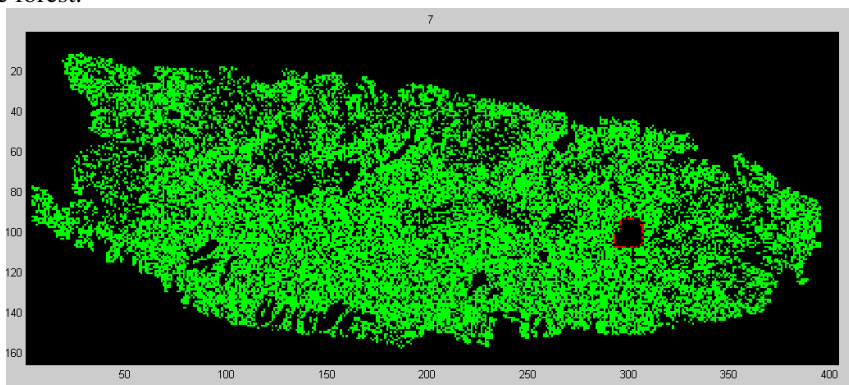


Fig. 5. Shape of forest fire after 7 time steps

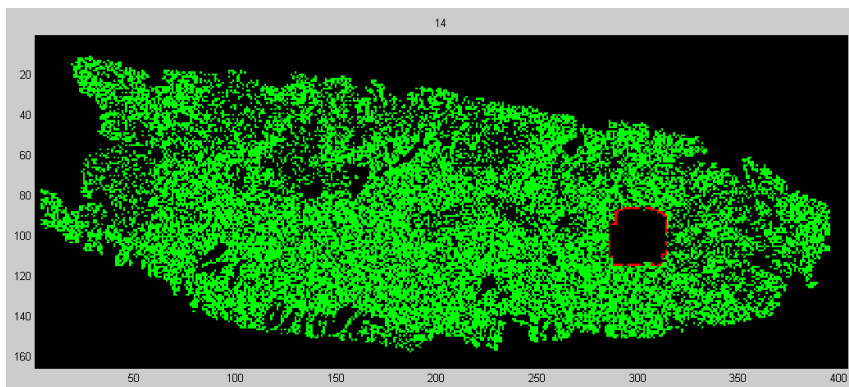


Fig. 6. Shape of forest fire after 14 time steps

Example 2:

In this example the fire was started in the area with lower flammability. The shape of fire front is irregular and the velocity of fire spread is slower. There are areas in the

middle of fire shape that are unburned. We can conclude that the intensity of fire was lower than in the example before.

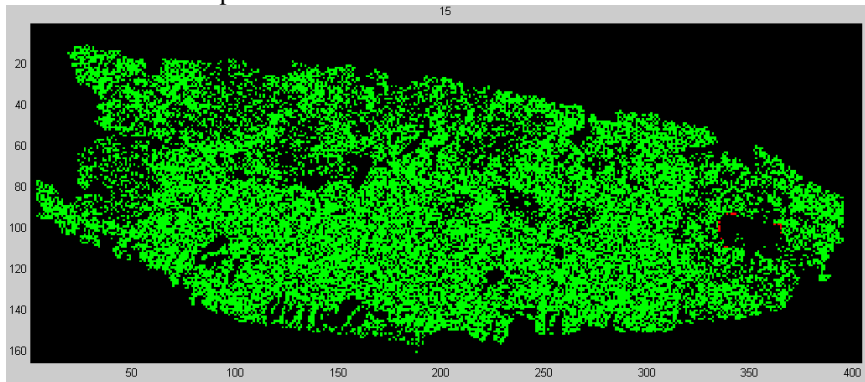


Fig. 7. Shape of forest fire after 15 time steps

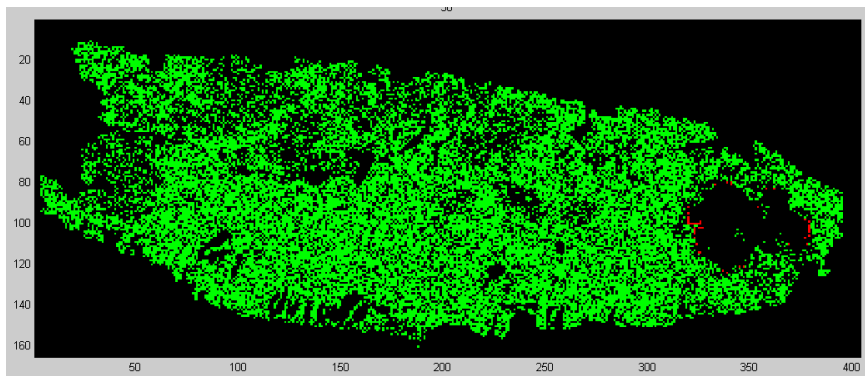


Fig. 8. Shape of forest fire after 30 time steps

Example 3:

Example with South-East wind:

The start point of fire is inside a forest area with higher density of trees. The shape of fire is typical for windy conditions, the fire moves faster, accelerated by the wind.

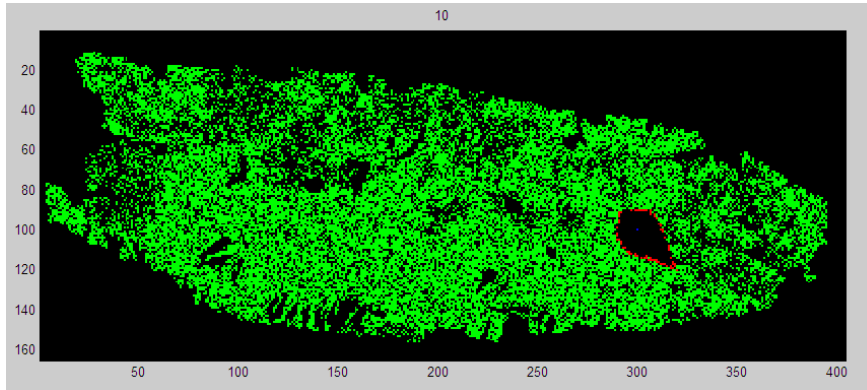


Fig. 9. Shape of forest fire started under strong wind conditions

Example 4:

This example shows the result of a simulation on a larger grid, that is higher resolution grid.

The blue spot represents the starting point of a fire. The wind is north. The picture shows the results after 100 time steps. Larger number of steps is required because the total number of cells is larger, and neighborhood is of range of 1, so the propagation will be slower, that is for one time step, smaller area will be affected.

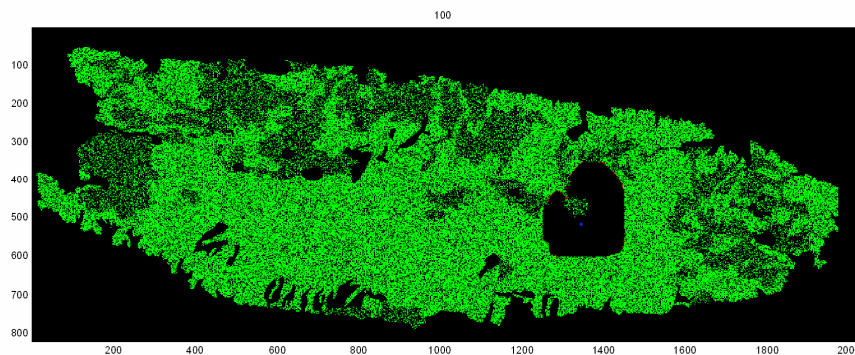


Fig. 10. Shape of forest fire simulation on a larger grid

Conclusion:

Fire models are useful in every aspect of fire protection activity – before fire, during fire and after fire. Different approaches to fire modeling and fire behavior prediction can be used, but in practice, most commonly, rough, simple models are used. In this paper cellular automata model has been applied to area of island Brac. Among input

parameters, only vegetation characteristics and wind conditions are taken into account. The results have shown that this approach is fast and satisfactory enough for practical use. Shape of the fire front achieved in the simulation is similar to shape of fire front developed in forest fires on the same area taken place in the past.

Future work on expanding input parameters can be done, considering that fire behavior is complex process controlled by many parameters, such as air temperature and humidity, fuel bed, fuel wetness, but here, only vegetation density and wind conditions has been taken into account. Combination of cellular automata model together with other computational methods would give more accurate results.

References:

1. D.Stipanicev, B.Hrastnik, Integral model for Forest Fires Protection in Split-Dalmatia County, FESB Report for Split-Dalmatia County, June 2003.
2. Ljiljana Bodrožić, Jadranka Marasović, Darko Stipanicev, Fire modeling in forest fire management, CEEPUS Spring School, Kielce, Poland, June 2 – 16, 2005.
3. Li Xiadong, W. Magill, Modeling fire spread under environmental influence using a cellular automation approach, Complexity International, 2001
4. A.L. Sullivan , I.K. Knight, A hybrid cellular automata/semi-physical model of fire growth, Proceedings of the 7th Asia-Pacific Conference on Complex Systems Cairns Convention Centre, Cairns, Australia,2004
5. António S. Camara, Francisco Ferreira, Spatial Simulation Modeling, Gasa, 1998
6. CORINE Land cover - Part 1: Methodology, available at <http://reports.eea.eu.int/COR0-part1/en>
7. <http://mathworld.wolfram.com/topics/CellularAutomata.html>